



LIGHT YOUR WAY

LED STRIP LIGHT

A LED strip solution

ULTRA Add an extensive array of lights and colors to any setting or interior, rejuvenate and transform the ambience of any environment at the flick of a switch with Ultra LED Strip Light Series. Easy installation with minimal space requirement makes this the right choice for Restaurants, Auditoriums and Meeting Rooms etc.

Benefits:







- Exceptionally low power consumption.
- Flexible and easy installation.
- Safe to use in most of the application.

Features:


- Replacement solution with a long life of 30,000 hours.
- Multiple visual effects in unending colours and shades.
- Available in IP20 and IP65 rating.
- Available in 12V and 24V with different color range (3000K- 6500K).

Application:

- Ideal for illuminating Borders, Edges, Cabinets, Bars and any area with limited space for installation.

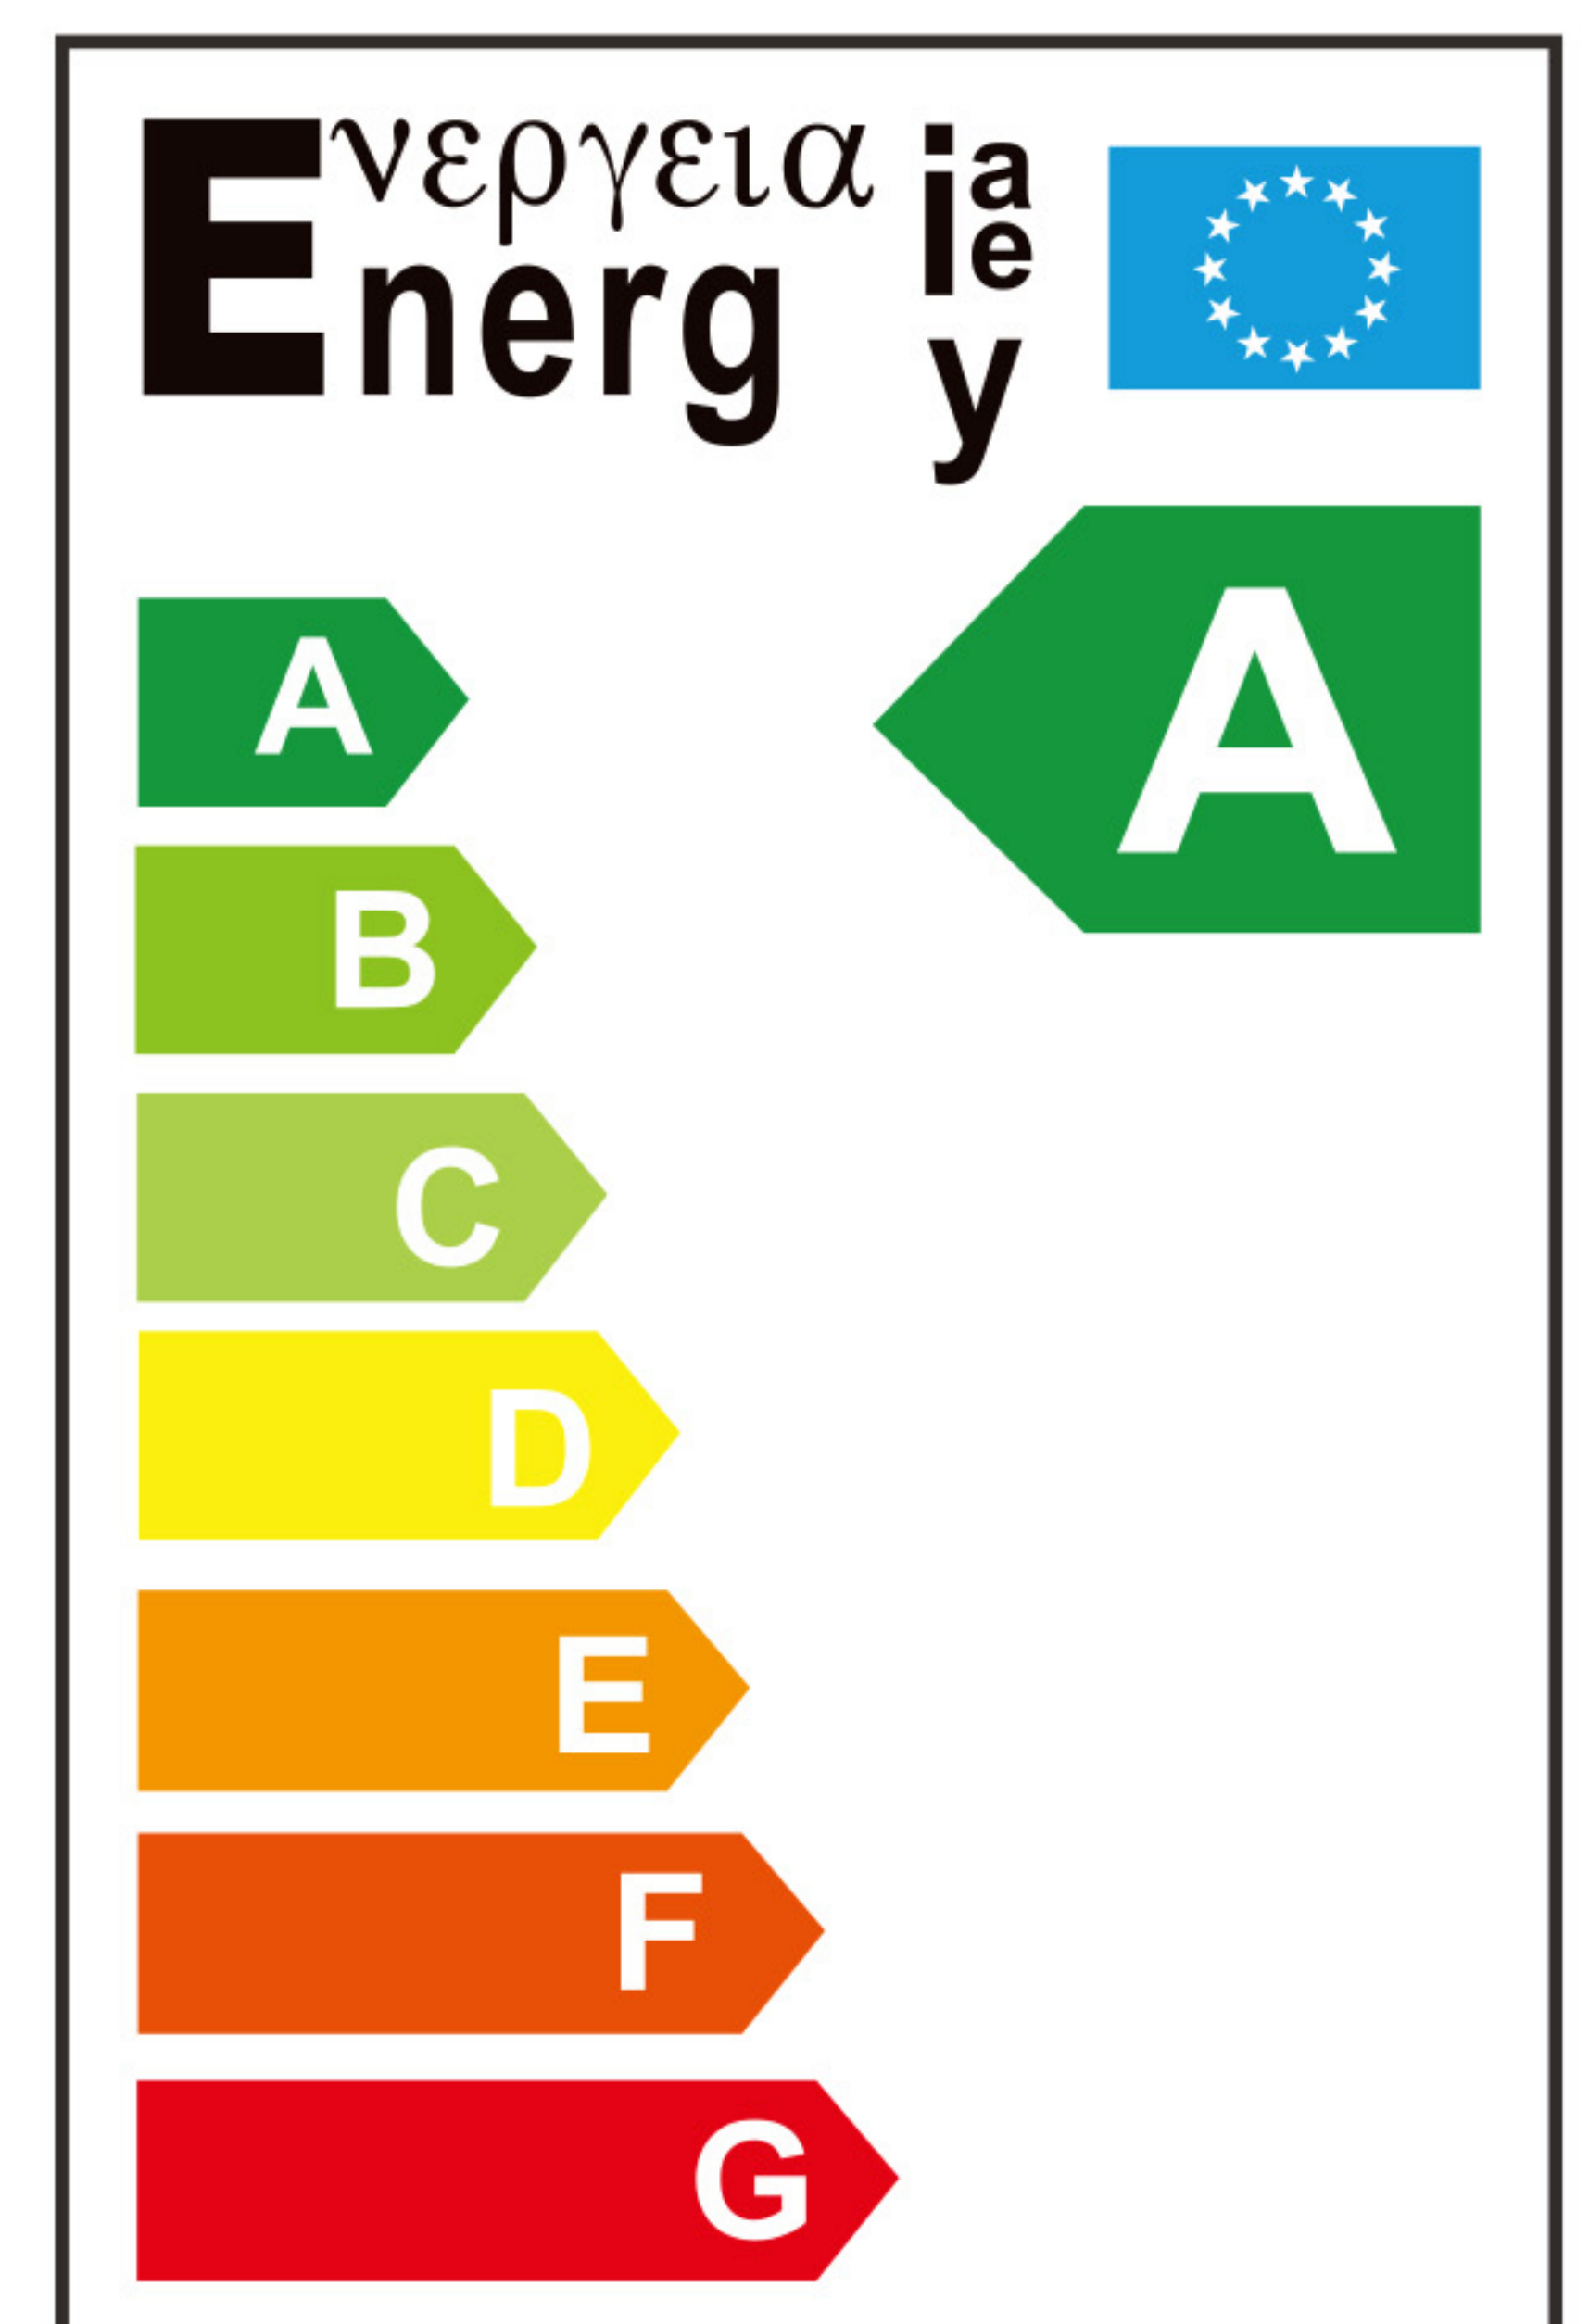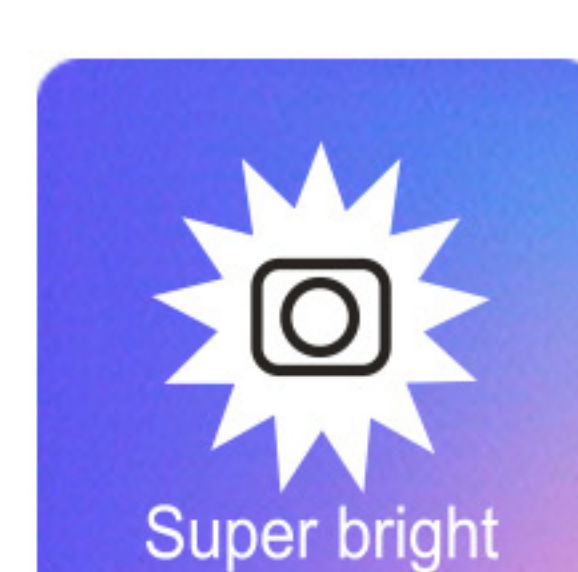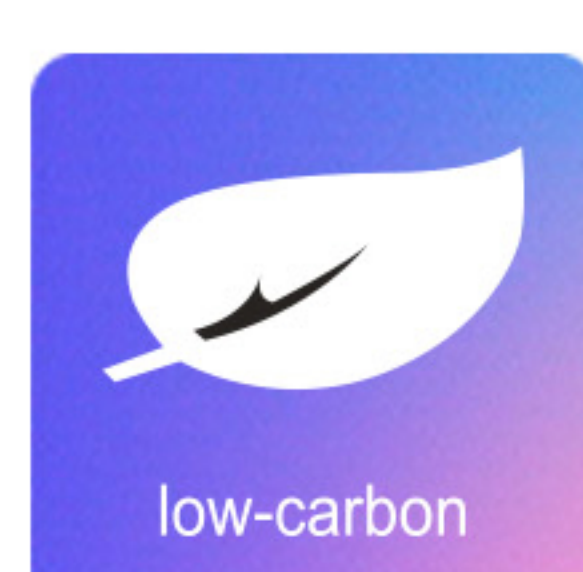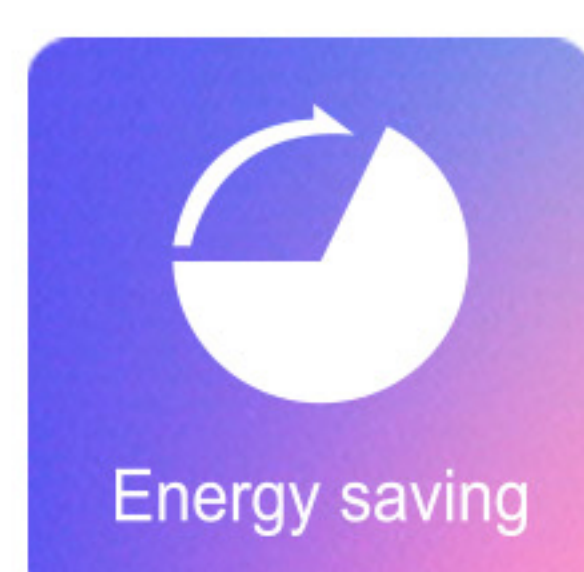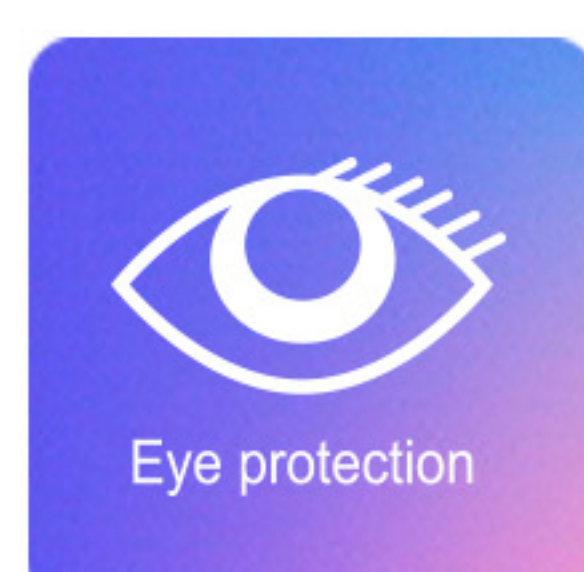



LED STRIP LIGHT

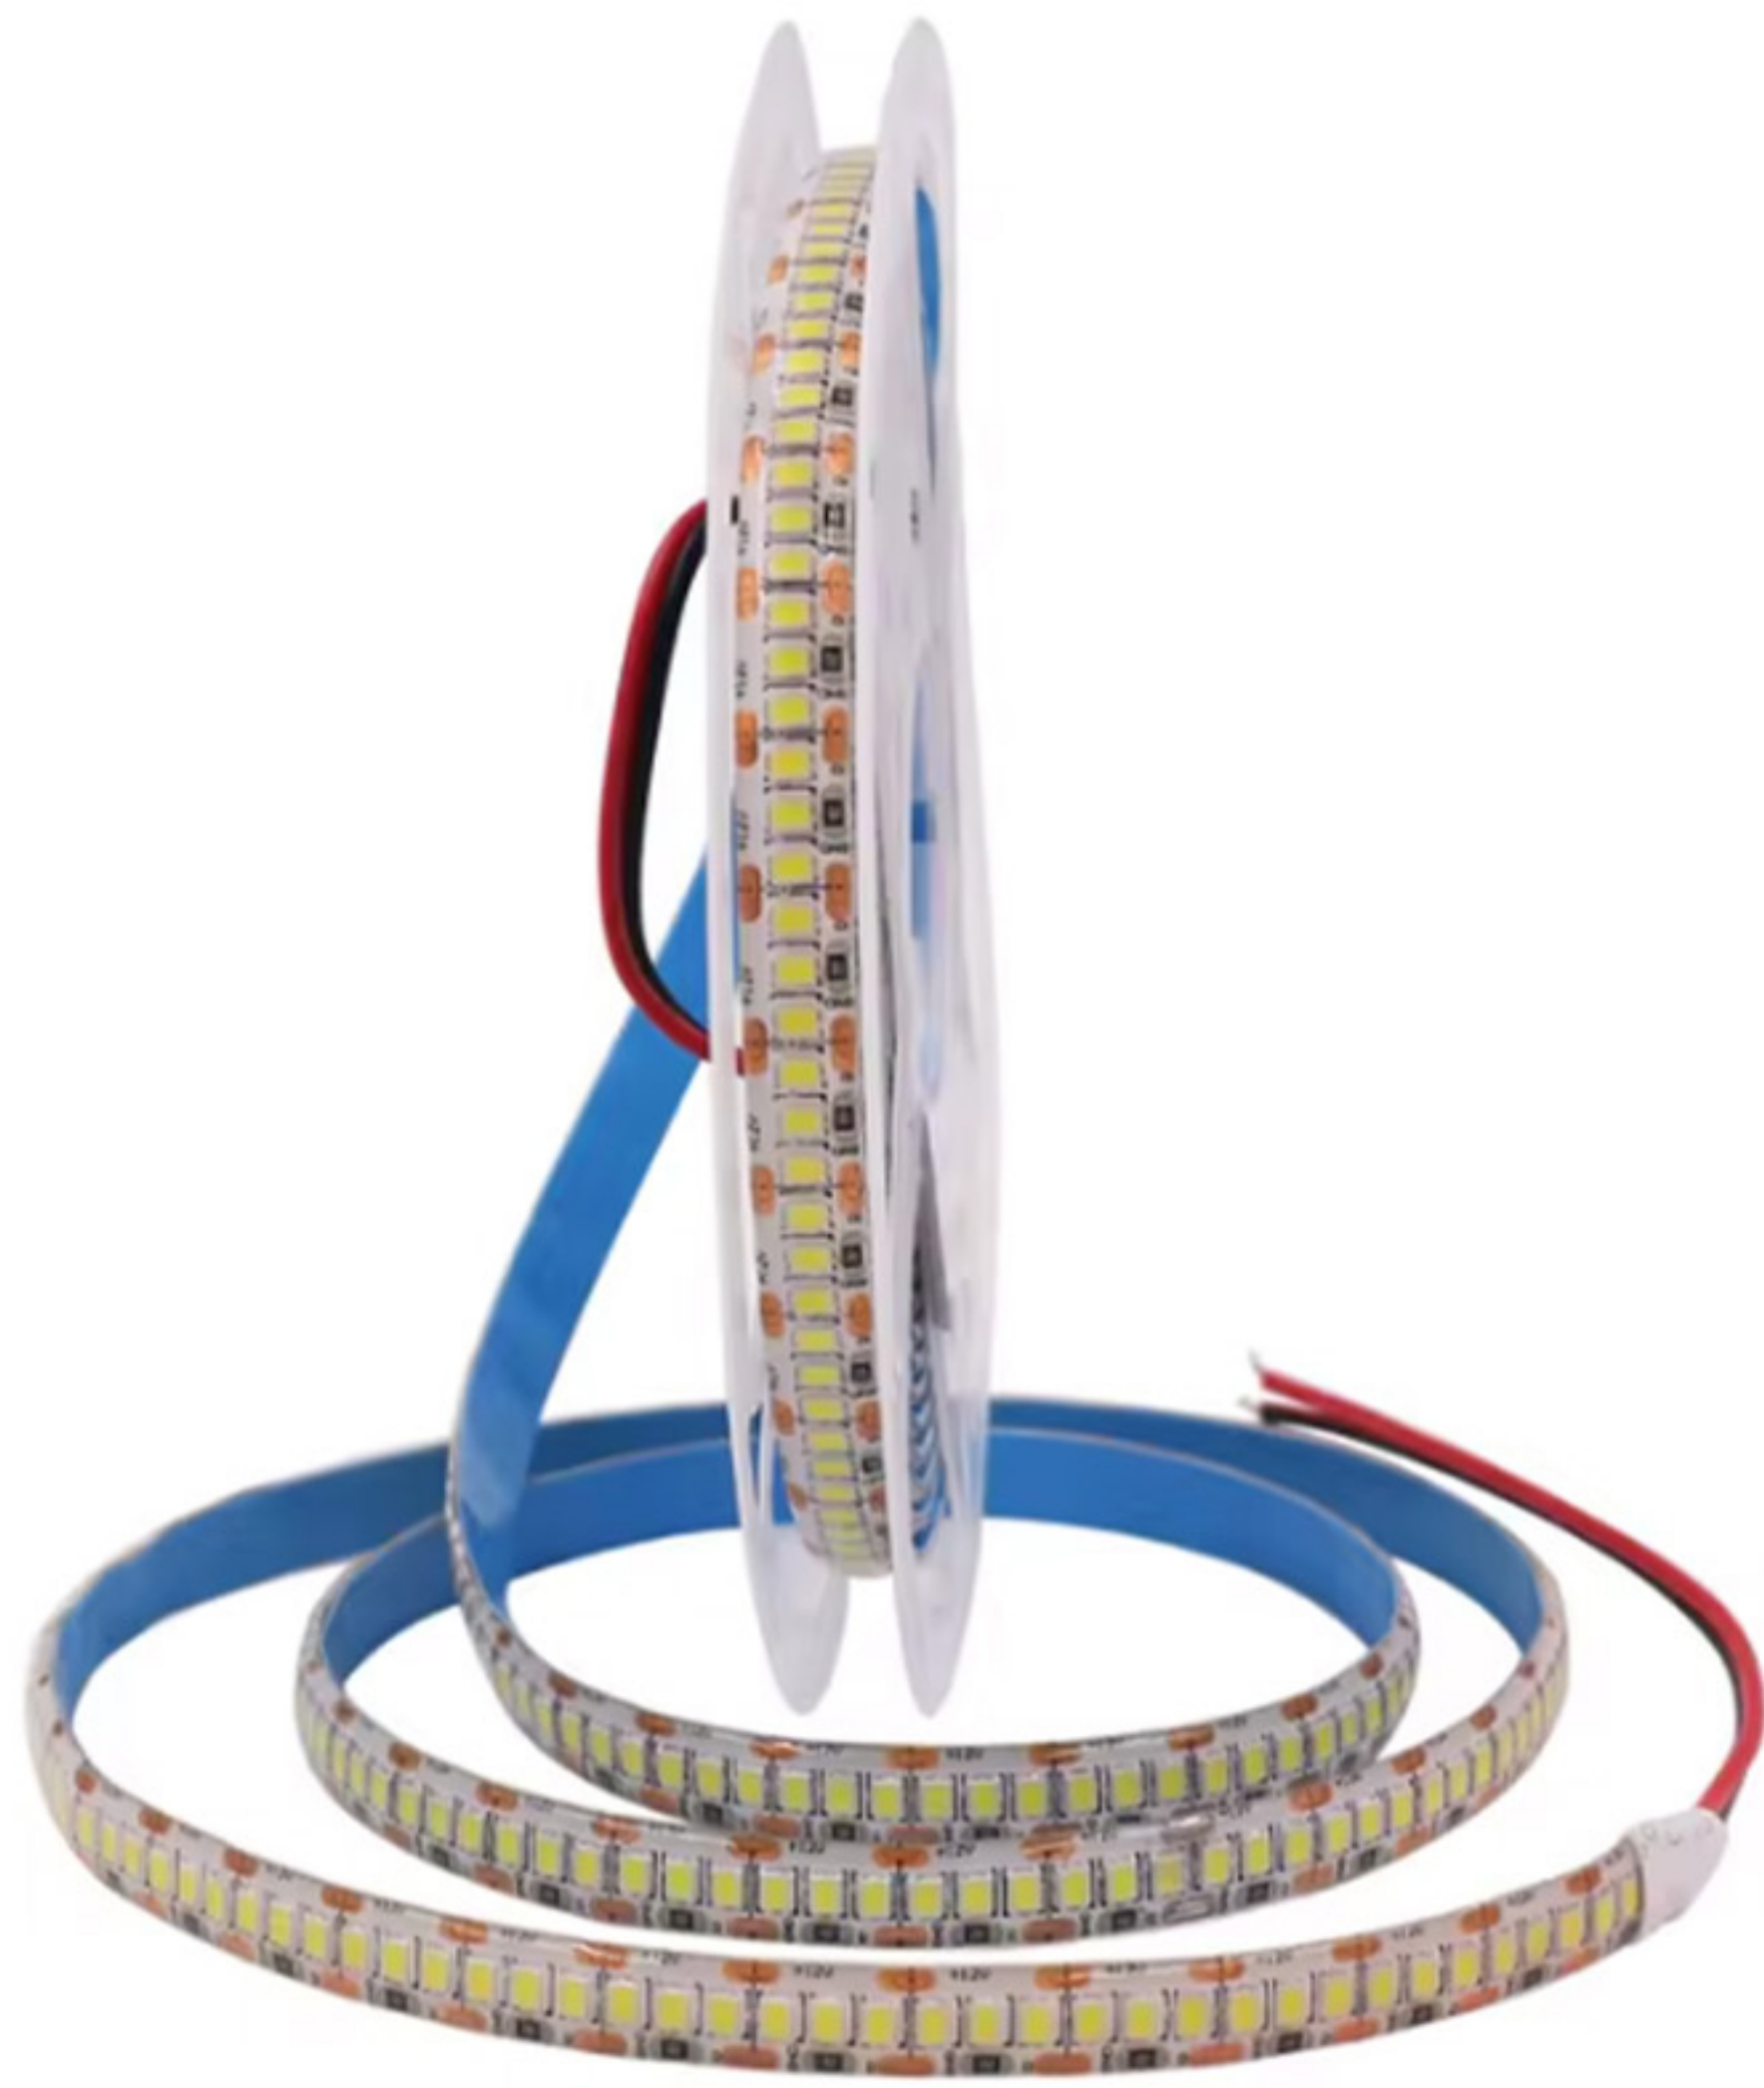

2835-NON WP
240 LED/M

3000_{LM/LED}
HIGH LUMEN

CRI >80

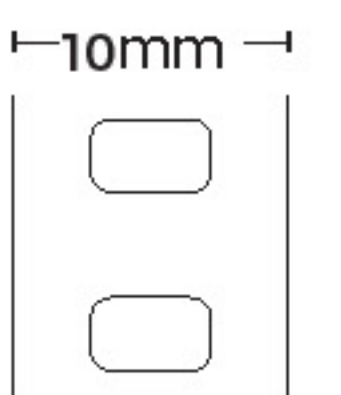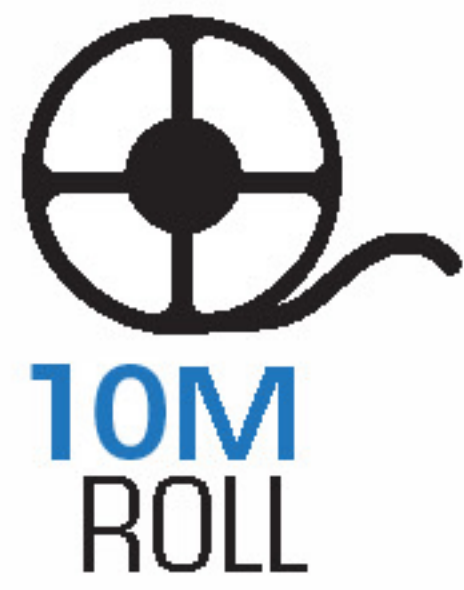

LED Type	2835
Watt/M	18W
Current/M	1.5A
Voltage	12V-24V DC
LED Qty	240
LM/LED	3000
Beam Angle	120°
IP Rating	IP20
Width	10mm

2835-NON WP
240 LED/M

Color

Warm White	3000K
Coolday	4000K
Daywhite	6000K


2835-NON WP
196 LED/M COB

Color

Warm White	3000K
Cool	4000K
Daywhite	6000K



5730-NON WP
120 LED/M

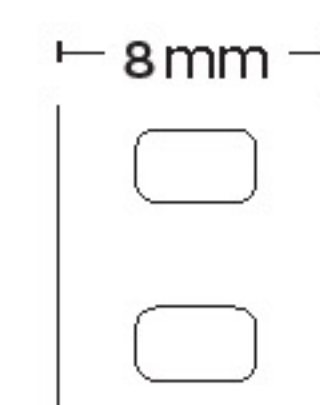

Color

Warm White	3000K
Coolday	4000K
Daywhite	6000K

LED Type	5730
Watt/M	10W
Current/M	0.85V
Voltage	12V DC - 24V DC
LED Qty	120
LM/LED	3000
Beam Angle	120°
IP Rating	IP20
Width	8mm



LED STRIP LIGHT



2835- WATERPROOF
240 LED/M

3000 LM/LED
HIGH LUMEN

CRI >80

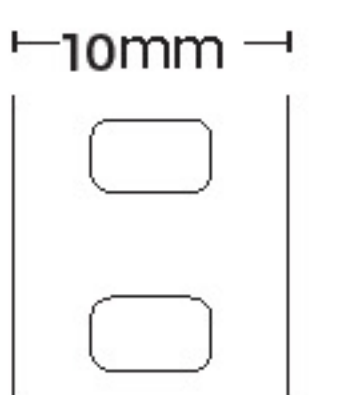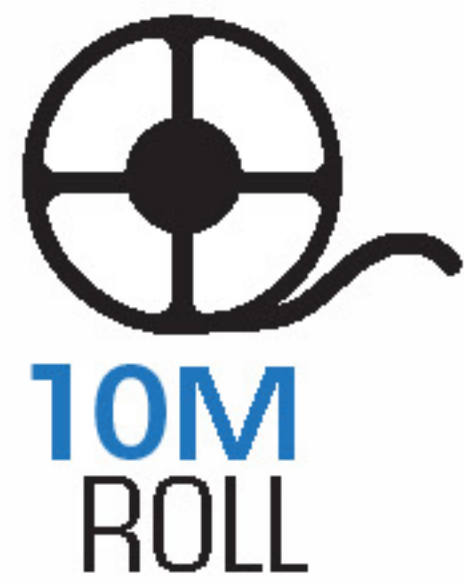

LED Type	2835
Watt/M	18W
Current/M	1.5A
Voltage	12V-24V DC
LED Qty	240
LM/LED	3000
Beam Angle	120°
IP Rating	IP20
Width	10mm

2835-WATERPROOF
240 LED/M

Color

Warm White	3000K
Coolday	4000K
Daywhite	6000K


2835-WATERPROOF
120 LED/M

Color

Warm White	3000K
Coolday	4000K
Daywhite	6000K



5730- WATERPROOF
280 LED/M COB

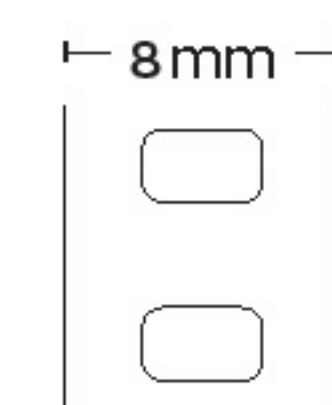

Color	CCT
Warm White	3000K
Coolday	4000K
Daywhite	6000K



LED Type	5730
Watt/M	10W
Current/M	0.85V
Voltage	220V
LED Qty	280
LM/LED	3000
Beam Angle	120°
IP Rating	IP65
Width	8mm